



M7i AND M10i MULTISERVICE EDGE ROUTERS

Product Overview

Juniper Networks M Series Multiservice Edge Routers uniquely combines best-in-class IP/MPLS capabilities with unmatched reliability, stability, security and service richness. These multiservice edge routing platforms allow providers and enterprises to consolidate multiple networks into a single IP/MPLS infrastructure while simultaneously generating new revenues with leading-edge services. M Series Multiservice Edge Routers use a hardware-based approach combined with the highly scalable, secure and reliable JUNOS Software, enabling multiple services without compromise on a single IP/MPLS platform. Providers enjoy maximized revenue and minimized operational and capital costs.

Product Description

The Juniper Networks® M7i and M10i Multiservice Edge Routers are ideal enterprise routing solutions for head offices, campuses and corporate backbones needing reliable, secure and high-performance IP WAN connectivity, Internet access and services. Unlike legacy routers with monolithic architectures and aging operating systems, the M Series M7i and M10i Multiservice Edge Routers boast a hardware-based architecture coupled with Juniper Networks JUNOS® Software, Juniper’s modern object-oriented operating system. This architecture ensures rich packet processing with uncompromising forwarding performance to support latency-sensitive applications such as voice, video and mission critical applications. The M7i and M10i routers are the choice for consolidating multiple services onto a single IP/MPLS network and delivering performance, reliability and security to the enterprise environment.

Deployed predominantly at the service-provider edge and in high-end, high-performance enterprise applications, the IP/MPLS M Series Multiservice Edge Routers are capable of supporting current and emerging Layer 2 and Layer 3 services. From a Layer 2 perspective, the J-FASE (Juniper Frame and ATM Service Emulation) toolkit, combined with M Series routing performance, enables accurate emulation of Asynchronous Transfer Mode (ATM) and Frame Relay services over MPLS. The same multiservice edge routing platform supports rich Ethernet services, enabling providers to capture revenue from this emerging service. Layer 2.5 Interworking VPNs are available to smoothly transition customers from ATM/FR to Ethernet services as demand dictates. M Series routers also deliver rich Layer 3 services, including the industry’s most scalable and comprehensive Layer 3 VPN portfolio, granular per logical interface quality of service (QoS), hardware-based IPv6, multicast, Network Access Translation (NAT), stateful firewall and IPsec encryption. New revenues are generated faster and more cost effectively with the scalable policy control of the Juniper Networks SDX300 Service Deployment System leveraging these rich features, making the M Series routers the one to choose for next-generation consolidated infrastructures.

Architecture and Key Components

Juniper Networks service-built M Series Multiservice Edge Routers are deployed in the world's largest networks, delivering advanced IP/MPLS edge routing services at scale and helping service providers transform their businesses. Constructed with clean separation between the control plane, forwarding plane and services plane, the M Series support multiple services without compromise on a single platform to maximize revenue and minimize operational and capital costs. Services supported include a broad array of VPNs, network-based security, real-time voice and video, bandwidth on demand, rich multicast of premium content, IPv6 services, granular accounting and much more. This IP/MPLS edge routing service portfolio continues to grow with every release of JUNOS, leveraging the tremendous flexibility and performance headroom of the service-built architecture.

Applications

The versatile M Series routers can be deployed in both the service provider environment and in high-end enterprise environments.

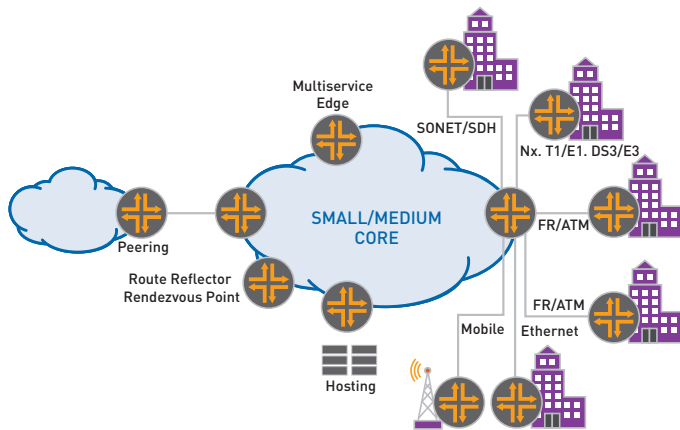


Figure 1: Service provider environment

In service provider environments, the M Series is deployed predominantly as a multiservice edge router but can also be deployed in small and medium cores, peering, route reflector, multicast, mobile and data center applications.

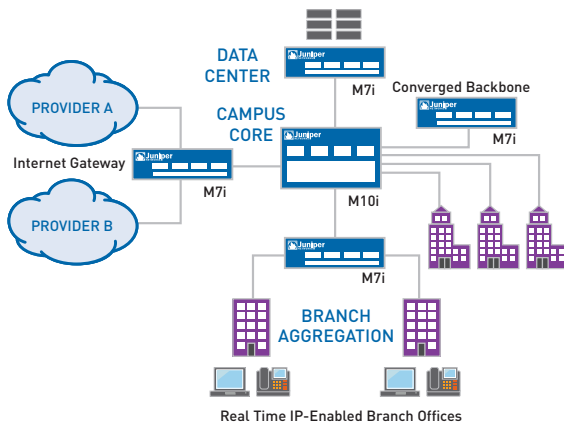


Figure 2: Enterprise

Large enterprises typically deploy M7i or M10i in a number of different locations, including Internet gateway router, WAN router, campus core router, regional backbone and data center.

Enhanced for the Edge

The versatile IP/MPLS M Series routers can be deployed at the edge of provider networks, in small and medium cores, and in peering, route reflector and data center applications. Recent M Series innovations have dramatically expanded edge capabilities by leveraging the highly programmable Internet Processor II application-specific integrated circuit (ASIC) and the IP/MPLS-rich JUNOS Software. M Series routers are now deployed and scaling services at the edge of some of the world's largest production networks.

Consistent Services to All Customers

The M Series spans from over 7 to 320 Gbps of throughput, including the M7i, M10i, M40e, M120 and M320 Multiservice Edge Routers. The same scalable and production-hardened JUNOS Software runs on all IP/MPLS M Series, making a consistent set of capabilities available at all network locations regardless of customer connection or serving area density.

Access-Agnostic with Leading Densities

With its broad interface portfolio, a single M Series router can provide a single point of edge aggregation for thousands of customers over any access type—including ATM, Frame Relay, Ethernet and time-division multiplexing (TDM)—and at any speed from DS0 up to OC-192/STM-64 and 10 Gigabit Ethernet. Leveraging dense Ethernet and highly channelized interfaces, the M Series boast leading densities.

Most Comprehensive VPN Portfolio

The M Series routers also support the industry's most comprehensive VPN portfolio with the ability to simultaneously run and scale Layer 2 virtual circuits, Layer 2 VPNs, Layer 2.5 Interworking VPNs, Layer 3 2547 VPNs, virtual private LAN service (VPLS), IPsec, generic routing encapsulation (GRE), IP over IP and other tunneling mechanisms—with no performance compromise. This broad set of VPNs meets the needs of the widest possible set of customers, maximizing the service provider's revenue while minimizing required infrastructure. For example, a provider can use Layer 3 VPNs to deliver an outsourced routing service and can also use Layer 2 VPNs to provide a point-to-point ATM service over a common IP/MPLS infrastructure.

Granular QoS and Statistics

Rich packet processing enables the M Series routers to support multiple levels of granular QoS per port, per logical circuit (DLCL, VC/VP, VLAN), and per channel (to DS0) for traffic prioritization. These comprehensive QoS functions include classification, rate limiting, shaping, weighted round-robin scheduling, strict priority queuing, weighted random early detection, random early detection and packet marking. For network convergence applications, Layer 2 class of service (CoS) can be mapped to Layer 3 CoS on a per DLCL, per VP/VC or per-VLAN basis. Simultaneously, extensive statistics can be collected and diagnostics performed at this same level of granularity to enable flexible billing, traffic planning and rapid troubleshooting.

Rich Packet Processing and Advanced Services

A broad portfolio of edge routing services can be layered on top of VPNs for additional revenue generation. A comprehensive suite of multicast capabilities, including multicast over MPLS VPNs, enables efficient distribution of premium content. Hardware-based IPv6 and a number of IPv6 migration tools, such as IPv6 over MPLS, ease access to the benefits of this next-generation IP protocol without performance compromise. NAT and stateful firewall can be configured per VPN routing and forwarding table (VRF) to enable network-based security for additional revenues. IPsec can be used to support a premium security service for end users with high security requirements. The M Series service-built edge is continuously enhanced with new packet processing capabilities to ensure maximum revenue-generation opportunities.

The latest addition in terms of advanced services capabilities is the integration of the Juniper Networks Multiservices PIC in the M7i which increases dramatically the embedded service performance of this platform.

Highly Reliable

The M Series service-built architecture has been constructed with scale and stability in mind, including the modular and fault-protected design of JUNOS and a rigorous system testing process. All M Series routers offer redundant power and cooling. The M10i, M40e, M120 and M320 routers offer fully redundant hardware, including redundant routing engines and Switching/Forwarding Engine Boards. JUNOS features enhance this redundant architecture. For example, nonstop forwarding is enabled in the event of a routing engine failure, via a hitless switchover, and in-service software upgrades are supported when a minor software upgrade is required. Other High Availability (HA) capabilities include graceful protocol routing restart, MPLS fast reroute, Virtual Router Redundancy Protocol (VRRP), SONET Automatic Protection Switching (APS), SDH Multiplex Section Protection (MSP), Bidirectional Forwarding Detection protocol (BFD) and Link Aggregation Control Protocol (LACP).

Robust Security

All M Series routers support highly scalable J-Protect filtering capabilities, unicast reverse path forwarding and high-performance rate limiting for industry-leading Denial of Service (DOS) attack protection. The J-Protect security capabilities of the M Series can be further enhanced with the Multiservices PIC, hardware that accelerates additional network-based security services such as high-speed NAT, stateful firewall with attack detection and J-Flow accounting. With the rich feature set of JUNOS combined with industry-leading ASIC technology, M Series service-built edge routing provides a new level of reliable and secure service delivery at the edge of service-provider networks.



M7i and M10i Specifications

Internet Protocols

- IPv4
- IPv6

Routing and Multicast

- OSPF
- BGP
- RIPv2
- Static routes
- IS-IS
- Multicast (IGMPv3, PIM, SDP, DVRMRP, Single Source)

IP Address Management

- Static
- DHCP relay

MPLS

- LDP
- RSVP-TE
- Traffic Engineering
- Layer 3 2547 VPN
- Layer 2 VPN
- Virtual Private LAN Service (VPLS)
- Diffserv-aware Traffic Engineering
- MPLS Detour
- MPLS Fast Reroute Link Protection
- MPLS Fast Reroute Node Protection
- MPLS Point-to-Multipoint (P2MP) Traffic Engineering

Encapsulations

- Ethernet (MAC+VLAN Tagged)
- PPP (Synch)
- PPPoA
- Frame Relay
- ATM
- HDLC
- Serial (RS-232, RS-449, X.21, V.35, EIA-530)
- 802.1q support
- MLPPP¹
- MLFR (FRF.15, FRF.16)¹
- L2TP (M7i, M10i and M120 can act as LNS)²

Traffic Management

- Policing & Shaping
- Class Based Queuing with Prioritization
- WRED
- Queuing based on VLAN/VC/VP/DLCI/Interface/Bundles

Voice Support

- FRF.12
- LFI¹
- cRTP²

Security

- Stateful Firewall²
- Attack detection²
- DOS & DDOS protections
- Tunnels (GRE, IP in IP)
- IPsec DES (56-bit), 3DES (168 bit) encryption³
- MD5 and SHA-1 authentication
- Packet filters

System Management

- JUNOS CLI
- JUNOScope Manager
- J-Web browser interface
- Service Deployment System (SDX)
- SNMPv2 and SNMP v3
- JUNOScript XML API

SLA and Measurement

- Real-Time Performance Measurement (delay/jitter)
- Alarm generation on SLA violation
- J-Flow2

Logging and Monitoring

- Syslog
- Traceroute
- MPLS Ping

High Availability

- VRRP
- IETF Graceful Restart
- Redundant forwarding and routing engines (M10i)
- Graceful Routing Engine Switchover (M10i)

Administration

- External administrator database RADIUS
- Configuration rollback
- Commit confirm for changes
- Software upgrades

¹These features require the Link Services PIC

²These features require the optional Adaptive Services Module for the M7i or the Adaptive Services II PIC or Multiservices PIC

³These features require either ASM, AS or MS PIC, or ES PIC

Specifications

| | M7i | M10i |
|--|--|--|
| Platform | | |
| Dimensions (W x H x D) | 17.5 x 3.5 x 18 in (44.5 x 8.9 x 45.7 cm) | 17.5 x 8.75 x 18 in (44.5 x 22.2 x 45.7 cm) |
| Fixed interfaces | 2 Fast Ethernet or 1 Gigabit Ethernet | None |
| Number of PIC Slots | 4 open slots | 8 open slots |
| Available PICs | See www.juniper.net | See www.juniper.net |
| Performance | | |
| Packet per second | 16 million packets per second | 16 million packets per second |
| Bits per second | 10 Gbps | 16 Gbps |
| WAN uplink | up to 1 Gigabit Ethernet | up to OC-48/STM-16* |
| Power System | | |
| Nominal voltage AC (DC option available) | 100-240 VAC, 47-63Hz | 100-240 VAC, 47-63Hz |
| Current/power | 4-2 Amps, 400 watts | 8-4 Amps, 800 watts |
| Power supplies required | 1 required, 2 for redundancy | 2 required, 3 for redundancy |
| Environment | | |
| Operating temp | 32° to 104° F (0° to 40° C) | 32° to 104° F (0° to 40° C) |
| Storage temp | -40° to 158° F (-40° to 70° C) | -40° to 158° F (-40° to 70° C) |
| Relative humidity (operating) | 5% to 90% noncondensing | 5% to 90% noncondensing |
| Agency Approvals | | |
| Safety certifications | CAN/CSA-C22.2 No. 60950-00/UL 60950 EN 60825-1 EN 60825-2 EN 60950 | |
| EMC | AS/NZS 3548 Class B (Australia / New Zealand) BSMI Class B (Taiwan) EN 55022 Class B Emissions (Europe) FCC Part 15 Class B (USA) VCCI Class B (Japan) | |
| ETSI | ETS-300386-2 Telecommunication Network Equipment Electromagnetic Compatibility Requirements | |
| Immunity | EN 61000-3-2 Power Line Harmonics EN-61000-3-3 EN 61000-4-2 ESD EN 61000-4-3 Radiated Immunity EN 61000-4-4 EFT EN 61000-4-5 Surge EN 61000-4-6 Low Frequency Common Immunity EN 61000-4-11 Voltage Dips and Sags | |
| NEBS compliant | GR-63-Core: NEBS, Physical Protection GR-1089-Core: EMC and Electrical Safety for Network Telecommunications Equipment SR-3580 NEBS Criteria Levels (Level 3 Compliance) | |

*OC-48/STM-16 interfaces are only supported on non-enhanced CFEB version

Performance-Enabling Services and Support

Juniper Networks is the leader in performance-enabling services and support, which are designed to accelerate, extend, and optimize your high-performance network. Our services allow you to bring revenue-generating capabilities online faster so you can realize bigger productivity gains, faster rollouts of new business models and ventures, and greater market reach, while generating higher levels of customer satisfaction. At the same time, Juniper Networks ensures operational excellence by optimizing your network to maintain required levels of performance, reliability, and availability. For more details, please visit www.juniper.net/products-services.

Ordering Information

| STANDARD | WITH MULTISERVICES MODULE | DESCRIPTION |
|----------|---------------------------|-------------|
|----------|---------------------------|-------------|

M7i Bundles

Fixed Interface Card with 2-port Fast Ethernet

| STANDARD | WITH MULTISERVICES MODULE | DESCRIPTION |
|---------------------|---------------------------|--------------|
| M7iE-2FE-RE400-US-B | M7iE-2FE-MS-RE400-US-B | AC, US cable |
| M7iE-2FE-RE400-UK-B | M7iE-2FE-MS-RE400-UK-B | AC, UK cable |
| M7iE-2FE-RE400-IT-B | M7iE-2FE-MS-RE400-IT-B | AC, IT cable |
| M7iE-2FE-RE400-EU-B | M7iE-2FE-MS-RE400-EU-B | AC, EU cable |
| M7iE-2FE-RE400-AU-B | M7iE-2FE-MS-RE400-AU-B | AC, AU cable |
| M7iE-2FE-RE400-JP-B | M7iE-2FE-MS-RE400-JP-B | AC, JP cable |
| M7iE-DC-2FE-RE400-B | M7iE-DC-2FE-MS-RE400-B | DC |

Fixed Interface Card with 1-port GbE

| STANDARD | WITH MULTISERVICES MODULE | DESCRIPTION |
|---------------------|---------------------------|--------------|
| M7iE-1GE-RE400-US-B | M7iE-1GE-MS-RE400-US-B | AC, US cable |
| M7iE-1GE-RE400-UK-B | M7iE-1GE-MS-RE400-UK-B | AC, UK cable |
| M7iE-1GE-RE400-IT-B | M7iE-1GE-MS-RE400-IT-B | AC, IT cable |
| M7iE-1GE-RE400-EU-B | M7iE-1GE-MS-RE400-EU-B | AC, EU cable |
| M7iE-1GE-RE400-AU-B | M7iE-1GE-MS-RE400-AU-B | AC, AU cable |
| M7iE-1GE-RE400-JP-B | M7iE-1GE-MS-RE400-JP-B | AC, JP cable |
| M7iE-DC-1GE-RE400-B | M7iE-DC-1GE-MS-RE400-B | DC |

Fixed Interface Card with 2-port GbE and SFP

| STANDARD | WITH MULTISERVICES MODULE | DESCRIPTION |
|---------------------|---------------------------|--------------|
| M7iE-2GE-RE400-US-B | M7iE-2GE-MS-RE400-US-B | AC, US cable |
| M7iE-2GE-RE400-UK-B | M7iE-2GE-MS-RE400-UK-B | AC, UK cable |
| M7iE-2GE-RE400-IT-B | M7iE-2GE-MS-RE400-IT-B | AC, IT cable |
| M7iE-2GE-RE400-EU-B | M7iE-2GE-MS-RE400-EU-B | AC, EU cable |
| M7iE-2GE-RE400-AU-B | M7iE-2GE-MS-RE400-AU-B | AC, AU cable |
| M7iE-2GE-RE400-JP-B | M7iE-2GE-MS-RE400-JP-B | AC, JP cable |

One chassis, one Fixed Interface Card (FIC) with either 2 x Fast Ethernet or 1 Gigabit Ethernet (GbE includes small form-factor pluggable (SFP) optic module with SX optics), one routing engine (400 MHz) with 768 M DRAM, one compact forwarding engine board with 128 M DRAM, one power supply, one fan tray, JUNOS Software, documentation CD. AC bundles include country-appropriate power cable. The Adaptive Services Module or Multiservices Module options (includes a free NAT/firewall multi-instance license) can be ordered installed on the compact forwarding engine board by using model numbers in the right column.

| RE-400 | RE-850 | DESCRIPTION |
|--------|--------|-------------|
|--------|--------|-------------|

M10i Bundles

| RE-400 | RE-850 | DESCRIPTION |
|---------------------|---------------------|--------------|
| M10iE-AC-RE400-US-B | M10iE-AC-RE850-US-B | AC, US cable |
| M10iE-AC-RE400-UK-B | M10iE-AC-RE850-UK-B | AC, UK cable |
| M10iE-AC-RE400-IT-B | M10iE-AC-RE850-IT-B | AC, IT cable |
| M10iE-AC-RE400-EU-B | M10iE-AC-RE850-EU-B | AC, EU cable |
| M10iE-AC-RE400-AU-B | M10iE-AC-RE850-AU-B | AC, AU cable |
| M10iE-AC-RE400-JP-B | M10iE-AC-RE850-JP-B | AC, JP cable |
| M10iE-DC-RE400-B | M10iE-DC-RE850-B | DC |

Each bundle includes chassis, one routing engine (400 MHz or 850 MHz options), one compact forwarding engine board with 128 M DRAM (two for redundant), one high-availability chassis manager board (two for redundant), one fan tray (two for redundant), two power supplies (three for AC redundancy, four for DC redundancy), JUNOS Software, documentation CD. AC bundles include country-appropriate power cables.

| MODEL | DESCRIPTION |
|-------|-------------|
|-------|-------------|

M7i/M10i Spares

| | |
|----------------------|---|
| FEB-M10i-M7i-S | M7i/M10i forwarding engine spare |
| FEB-M7i-SVCS-S | M7i forwarding engine spare with built-in services module |
| FEB-M10i-M7i-E-S | M7i enhanced forwarding engine spare |
| FEB-M7i-SVCS-ASM-E-S | M7i enhanced forwarding engine spare with built-in Adaptive Services module |
| FEB-M7i-SVCS-MS-E-S | M7i enhanced forwarding engine spare with built-in Multiservices module |
| RE-400-768-S | Routing Engine board spare (400 MHz Celeron, 768 MB DRAM) |
| RE-400-768-WW-S | Routing Engine board spare (400 MHz Celeron, 768 MB DRAM) - JUNOS worldwide |
| RE-850-1536-S | Routing Engine board spare (850 MHz Pentium III, 1536 MB DRAM) |
| RE-850-1536-WW-S | Routing Engine board spare (850 MHz Pentium III, 1536 MB DRAM - JUNOS worldwide) |
| CHAS-MP-M10i-S | M10i chassis spare |
| CHAS-MP-M7i-1GE-S | M7i chassis spare, 1 built-in GbE port |
| CHAS-MP-M7i-2FE-S | M7i chassis spare, 2 built-in FE ports |
| HCM-M10i-S | High availability chassis manager board for M10i |
| PWR-M10i-M7i-AC-S | M7i/M10i AC power supply spare |
| PWR-M10i-M7i-DC-S | M7i/M10i DC power supply spare |
| FANTRAY-M7i-S | M7i fan tray spare |
| FANTRAY-M10i-S | M10i fan tray spare |
| CF-UPG2-1G-S | Upgrade kit 1 G compact flash upgrade for RE 400/850 |
| RE-CF-1G-S | Compact flash media upgrade for RE |
| MEM-FEB-256-S | Optional M10i, M7i Forwarding Engine Board (FEB) memory upgrade: 256 MB DRAM module |
| MEM-RE-256-S | Optional RE memory upgrade: 256 MB DRAM module |

Software Licenses

| | |
|-----------|---|
| JS-IPv6-L | IPv6 support on JUNOS Software (low end) |
| JS-LR | Logical router support for JUNOS Software |

Ordering (continued)

| MODEL | DESCRIPTION |
|--|--|
| M7i/M10i Physical Interface Cards | |
| Ethernet | |
| PE-1GE-SFP-QPP | 1-port Gigabit Ethernet IQ PIC. Requires SFP optic module. |
| PE-1GE-SFP | 1-port Gigabit Ethernet PIC. Requires SFP optic module. |
| PE-4GE-TYPE1-SFP-IQ2 | 4-port Type1 Gigabit Ethernet IQ2 PIC. Requires SFP optic module. |
| PE-4GE-TYPE1-SFP-IQ2E | 4-port Type 1 Gigabit Ethernet Enhanced IQ2 PIC. Requires SFP optic module. |
| PE-12FE-TX-MDI | 12-port 10,100 TX Ethernet PIC. Includes 3-meter VHDCI to RJ21 Ethernet breakout cable. Connects to RJ21 to RJ45 patch panel and services (12) 10,100 Ethernet ports. Configured for MDI pinout. |
| PE-12FE-TX-MDIX | 12-port 10,100 TX Ethernet PIC. Includes 3-meter VHDCI to RJ21 Ethernet breakout cable. Connects to RJ21 to RJ45 patch panel and services (12) 10,100 Ethernet ports. Configured for MDI-X pinout. |
| PE-4FE-TX | 4-port Fast Ethernet PIC, TX interface, RJ45 connector |
| ATM | |
| PE-10C12-ATM2-SMIR | 1-port OC-12/STM4 ATM2 IQ PIC, single mode, IR |
| PE-20C3-ATM2-MM | 2-port OC-3/STM1 ATM2 IQ PIC, multi mode |
| PE-20C3-ATM2-SMIR | 2-port OC-3/STM1 ATM2 IQ PIC, single mode, IR |
| PE-4DS3-ATM2 | 4-port DS3 ATM2 IQ PIC (ships with cable) |
| PE-2E3-ATM2 | 2-port E3 ATM2 IQ PIC (ships with cable) |
| POS | |
| PE-10C12-SON-SFP | 1-port OC12/STM4 or OC3/STM1, rate-selectable PIC. Requires OC12 or OC3 SFP |
| PE-20C3-SON-SFP | 2-port OC3/STM1 PIC. Requires SFP optic module. |
| PE-40C3-10C12-SON-SFP | 4-port OC3/STM1 or 1-port OC12/STM4, rate-selectable PIC. Requires SFP optic module. |
| Clear Channel | |
| PE-4DS3 | 4-port DS3 PIC (and cables) with PIC ejector |
| PE-2DS3 | 2-port DS3 PIC (and cables) with PIC ejector |
| PE-4E3-QPP | 4-port E3 IQ PIC |
| PE-2E3 | 2-port E3 PIC (and cables) with PIC ejector |
| PE-4E1-COAX | 4-port E1 PIC (75-ohm BNC connectors) (ships with cables) |
| PE-4E1-RJ48 | 4-port E1 PIC (120-ohm, RJ48 connectors) |
| PE-4T1-RJ48 | 4-port T1 PIC, (120-ohm, RJ48 connectors) |
| PE-2EIA530 | 2-port EIA-530 PIC (DB-25 connector) |
| Channelized | |
| PE-1CHSTM1-SMIR-QPP | 1-port channelized STM1 to DS0 IQ PIC, SM, IR QPP |
| PE-4CHDS3-QPP | 4-port channelized DS3 to DS0 IQ PIC, BNC |
| PE-10CHE1-RJ48-QPP-N | 10-port channelized E1 to DS0 IQ PIC, RJ48 QPP-N |
| PE-1CHOC3-SMIR-QPP | 1-port channelized OC3 to DS0 IQ PIC, SM, IR |
| PE-1CHOC12SMIR-QPP | 1-port channelized OC-12 to DS0 IQ PIC, SM, IR QPP |
| PE-10CHT1-RJ48-QPP | 10-port channelized T1 to DS0 IQ PIC |

| MODEL | DESCRIPTION |
|---|---|
| Circuit Emulation | |
| PE-12T1E1-CE-TELCO | 12-port discrete T1/E1 (Telco connector). |
| PE-4CHOC3-CE-SFP | 4-port channelized OC3/STM1 (down to T1/E1). Requires SFP optic module. |
| Services | |
| PE-MS-100-1 | Multiservices PIC, 1 GB DRAM |
| PE-AS2-FIPS | Adaptive Services PIC II - FIPS |
| PE-AS2-LAYER2SERVICES | Adaptive Services PIC II - Layer 2 services: supports link services (S-LSSL-4, S-LSSL-64, S-LSSL-256), CRTP (S-CRTP) and tunnel services (S-TUNNEL) |
| PE-LS-4 | Link services PIC, 4 ML bundles, 256 LFI links, tunnel services |
| PE-LS-32 | Link services PIC, 32 ML bundles, 256 LFI links, tunnel services |
| PE-TUNNEL | Tunnel services PIC with PIC ejector |
| Software Licenses for the Services PIC or Module | |
| S-NAT-FW-SINGLE | Single-instance NAT/firewall |
| S-NAT-FW-MULTI | Multi-instance NAT/firewall |
| S-ACCT | J-Flow |
| S-CRTP | CRTP |
| S-LNS | L2TP LNS |
| S-ES | IPsec |
| Interface Accessories | |
| CBL-EIA530-V35-DTE | EIA-530 to V.35 cable (DTE) for M Series |
| CBL-EIA530-X21-DTE | EIA-530 to X.21 cable (DTE) for M Series |
| CBL-RJ21-MDI-S | 3-meter VHDCI to RJ21 Ethernet cable spare for PE-12FE-TX |
| CBL-RJ21-MDIX-S | 3-meter VHDCI to RJ21 Ethernet cable spare for PE-12FE-TX |
| CBL-SMZ-BNC-M-S | 10-ft SMZ to BNC coaxial cable spare for DS3/E3 PICs |
| SFP-1GE-SX | SFP 1000BASE-SX Gigabit Ethernet optic module |
| SFP-1GE-LX | SFP 1000BASE-LX Gigabit Ethernet optic module |
| SFP-1GE-T | SFP 1000BASE-T Gigabit Ethernet module (uses Cat 5 cable) |
| SFP-1GE-LH | SFP 1000BASE-LH Gigabit Ethernet optic module, LH |
| SFP-OC12-SR | SFP OC12/STM4 optic module, SR |
| SFP-OC12-IR | SFP OC12/STM4 optic module, IR |
| SFP-OC12-LR | SFP OC12/STM4 optic module, LR |
| SFP-OC3-SR | SFP OC3 optic module, MM, SR |
| SFP-OC3-IR | SFP OC3 optic module, SM, IR |
| SFP-OC3-LR | SFP OC3 optic module, SM, LR |

For additional physical interface cards, please see www.juniper.net/us/en/products-services/routing/m-series/.

About Juniper Networks

Juniper Networks, Inc. is the leader in high-performance networking. Juniper offers a high-performance network infrastructure that creates a responsive and trusted environment for accelerating the deployment of services and applications over a single network. This fuels high-performance businesses. Additional information can be found at www.juniper.net.

Corporate and Sales Headquarters

Juniper Networks, Inc.
1194 North Mathilda Avenue
Sunnyvale, CA 94089 USA
Phone: 888.JUNIPER (888.586.4737)
or 408.745.2000
Fax: 408.745.2100

APAC Headquarters

Juniper Networks (Hong Kong)
26/F, Cityplaza One
1111 King's Road
Taikoo Shing, Hong Kong
Phone: 852.2332.3636
Fax: 852.2574.7803

EMEA Headquarters

Juniper Networks Ireland
Airsides Business Park
Swords, County Dublin, Ireland
Phone: 35.31.8903.600
Fax: 35.31.8903.601

Copyright 2009 Juniper Networks, Inc. All rights reserved. Juniper Networks, the Juniper Networks logo, JUNOS, NetScreen, and ScreenOS are registered trademarks of Juniper Networks, Inc. in the United States and other countries. JUNOSe is a trademark of Juniper Networks, Inc. All other trademarks, service marks, registered marks, or registered service marks are the property of their respective owners. Juniper Networks assumes no responsibility for any inaccuracies in this document. Juniper Networks reserves the right to change, modify, transfer, or otherwise revise this publication without notice.

To purchase Juniper Networks solutions, please contact your Juniper Networks representative at 1-866-298-6428 or authorized reseller.

